

Approaching conveyor spillage control from a different angle!







Advantages & Benefits

- Works very effectively on both large and fine particles
- Reduces dust emission and explosion hazards
- Eliminates belt damage due to absence of skirt contact
- Hardened steel blades reduces skirt wear
- Reduces motor power requirement as there is no belt-skirt friction
- Vastly prolongs life expectancy due to lack of belt contact
- Reduced product loss
- Significantly reduced maintenance and replacement cost
- Easy installation and can normally use existing clamping system
- Continuous skirting with no gaps

Working Principle

AirScrape is a newly patented German designed and manufactured conveyor belt skirting system which hovers freely above the conveyor belt, eliminating skirt friction & belt damage.

Its unique array of inward facing hardened steel diagonal blades, deflect larger particles inwards while it uses the airflow of the conveyor belt and conveyed material to create an inward suction, flowing any dust and fine particles back in to the product flow.

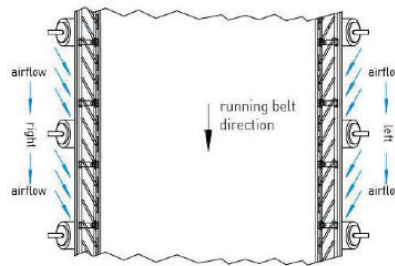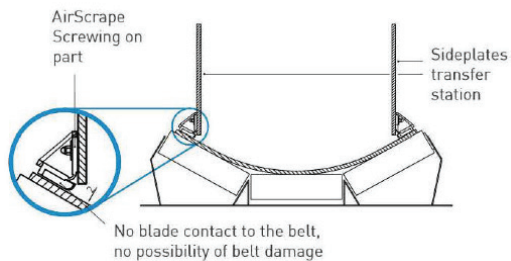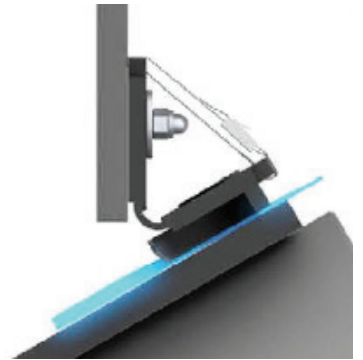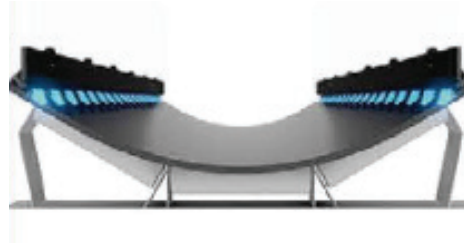

Dimensions

AirScrape is available in pairs of Left and Right hand side 2 metre interconnectable pieces to form any required length and is available in two different base widths of 90mm and 60mm to suite a variety of belt widths and chutes sizes.

Installation

AirScrape is installed, using spacers, floating the blades several mm free above the belt and is attached to the outside of the chute by utilising existing skirt clamps or a simple bolt and nut system. It is longitudinally and laterally adjustable to follow the contours of conveyor belt rollers and belt trough angles.



Management
Systems
ISO 9001:2008

www.tuv.com
ID 1100000594

Address: C3, 20 Tarlton Cres, Perth Airport WA 6105

Postal Address: PO Box 602, North Perth, WA 6906

Phone Number: 1300 70 70 67

Email: sales@lorbrand.com.au

Web: lorbrand.com.au

01-LB-CS-Airscrape